


## 5-2250MHz DIGITAL DISHNET MULTISWITCH

- Aluminum Die-Cast Housing. Water Proof.
- Four satellite inputs for four satellite receivers
- Built-in amplifier to overcome splitter loss.
- Two dual LNB selectable by 13/18VDC or 22kHz tone.
- Matrix routes between any inputs to any outputs
- HDTV ready.
- Low power consumption multiswitch with inline power inserter and power supply.

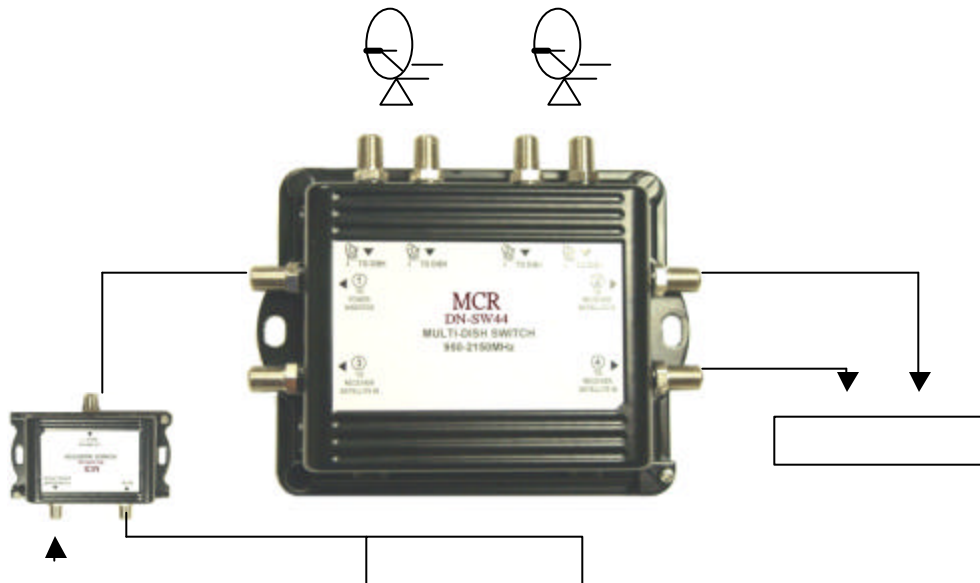

SPECIFICATION		MODEL # DN-SW44	
		TYPICAL	Q.C LIMIT
Frequency		950 ~ 2250MHz	
Inputs		4 SAT.	
Outputs		4	
Isolation	Dish-Dish 950~2250MHz	30dB	=30dB
	Out-Out 950~2250MHz	28dB	=25dB
	Dish Rec. 950~2250MHz	20dB	=20dB
Return Loss	Sat. In 950~2250MHz	9dB	=8dB
Insertion	Sat. 950~2250MHz	5dB	=6dB
Max. DC Current To LNBs (mA)		1000	
DC Current Consumption (mA)		40	